



Master Whisk

Ref : FT001

MASTER SERIES



Description

- Sturdy, powerful
- Non detachable whisk: ensures durability of the product
- Stainless steel ejectable whisks for easy cleaning and perfect hygiene.
- Variable speed as standard
- Security button
- Double insulation



OUTPUT MAX	600 W
SPEED	300 to 900 R.P.M.
VOLTAGE	110-120V - 220-240V 50-60Hz
TOTAL LENGTH	650 mm / 25.6"
SHAFT LENGTH	245 mm / 9.6"
DIAMETER	110 mm / 4.3"
ACTUAL WEIGHT	3,3 kg / 7.3 lbs

Use

Ideal to prepare with ease batters, creams, mousseline sauces and whipped egg whites.

Capacity : 5 to 20 Liters

Maintenance

Dismantle whips from their attachments by pushing strongly on the cups, then you can securely rinse the whisks under running water.



Never clean this machine with a water jet spray.

Wash the motor block with a sponge or with a slightly damp cloth.

Dynamic
518 rue Léo Baekeland
BP57 - 85290 Mortagne sur Sèvre
Tel : +33 (0)2 51 63 02 72
Fax : +33 (0)2 51 63 02 73
E-mail : contact@dynamicmixers.com

www.dynamicmixers.com

TECHNICAL SHEET

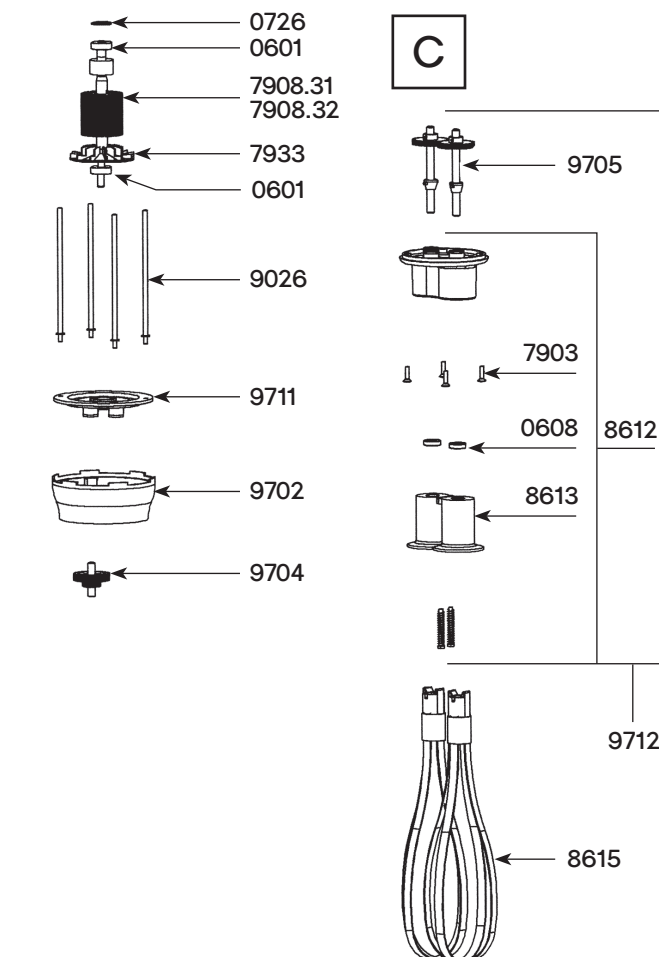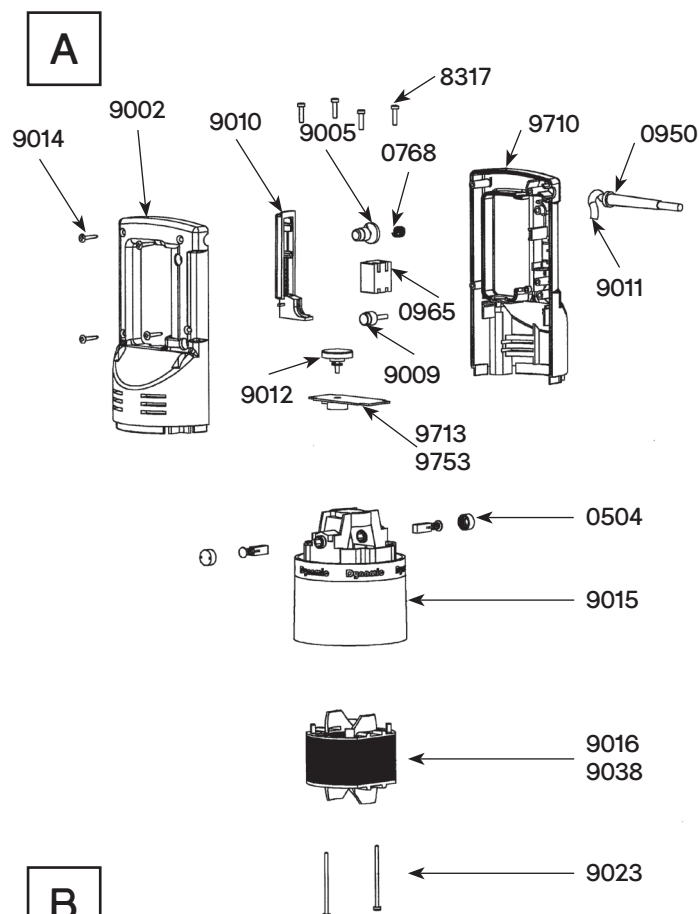

Parts list

Code

Carbon brushes (2)	0504
Ball bearing	0601
Waterproof seal	0608
Squeezing washer	0726
Pin 3 X 20	0744
Pin 3 X 14	0745
Safety button return spring	0768
Wall bracket	0881
Strain relief 230 V	0950
Strain relief 115 V	0950.1
Switch	0965
Capacitor	0972
Capacitor + filter	0972.1
ID label 115 V	1019
ID label 230 V	1020
Dynamic label	1027
Brace screws (4)	7903
Rotor 115 V	7908.31
Rotor 230 V	7908.32
Fan	7933
Brace screws (4)	8317
Holder + plastic ejector + seal	8612
Plastic ejector (pair)	8613
Whisk only (pair)	8615
Half handle (button side)	9002
Safety button	9005
Plug	9009
Control lever	9010
Power cord 230 V	9011
Variable speed control button	9012
Handle screws (4)	9014
Motor housing brush holder	9015
Stator 230 V	9016
Field brace screws (2)	9023
Braces	9026
Stator 115 V	9038
Power cord 115 V	9040
Carbon brush wires (230 V)	9043
Power cord (Australia)	9066
Power cord (UK)	9067
Carbon brush wires (115 V)	9143
Lower aluminum housing	9702
Middle gear & shaft	9704
Output gear & shaft + Pins	9705
Complete handle 230 V	9706
Complete handle 115 V	9706.1
Half handle (label side) 230 V	9710
Half handle (label side) 115 V	9710.1
Plate w/ 3 seals	9711
Holder without gear	9712
Variable speed control board 230 V	9713
Variable speed control board 115 V	9753